

This Page Is Inserted by IFW Operations  
and is not a part of the Official Record

## **BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images may include (but are not limited to):

- BLACK BORDERS
- TEXT CUT OFF AT TOP, BOTTOM OR SIDES
- FADED TEXT
- ILLEGIBLE TEXT
- SKEWED/SLANTED IMAGES
- COLORED PHOTOS
- BLACK OR VERY BLACK AND WHITE DARK PHOTOS
- GRAY SCALE DOCUMENTS

## **IMAGES ARE BEST AVAILABLE COPY.**

As rescanning documents *will not* correct images,  
Please do not report the images to the  
Image Problem Mailbox.

(19)



Europäisches Patentamt

European Patent Office

Office européen des brevets



(11)

EP 0 994 522 A2

(12)

## EUROPEAN PATENT APPLICATION

(43) Date of publication:  
19.04.2000 Bulletin 2000/16

(51) Int Cl.7: H01M 10/40, H01M 4/74,  
H01M 4/66

(21) Application number: 99308071.2

(22) Date of filing: 13.10.1999

(84) Designated Contracting States:  
AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU  
MC NL PT SE  
Designated Extension States:  
AL LT LV MK RO SI

(72) Inventors:  
• Chang, Youn-han  
Suwon-city, Kyungki-do (KR)  
• Kim, Jung-ho  
Suwon-city, Kyungki-do (KR)

(30) Priority: 13.10.1998 KR 9842711

(74) Representative: Ertl, Nicholas Justin  
Elkington and Fife,  
Prospect House,  
8 Pembroke Road  
Sevenoaks, Kent TN13 1XR (GB)


(71) Applicant: Samsung Display Devices Co., Ltd.  
Suwon-City, Kyungki-do 445-970 (KR)

## (54) Lithium polymer battery

(57) A lithium (Li) polymer battery is provided. The Li polymer battery includes: a positive plate (21) including a positive collector (21a) having a plurality of openings and a positive active material layer (21b) formed on at least one surface of the positive collector (21a); a

negative plate (22) including a negative collector (22a) in a foil form, and a negative active material layer (22b) formed on at least one surface of the negative collector (22a); and a separator (23) between the positive (21) and negative (22) plates, for insulating the positive (21) and negative (22) plates.

FIG. 3

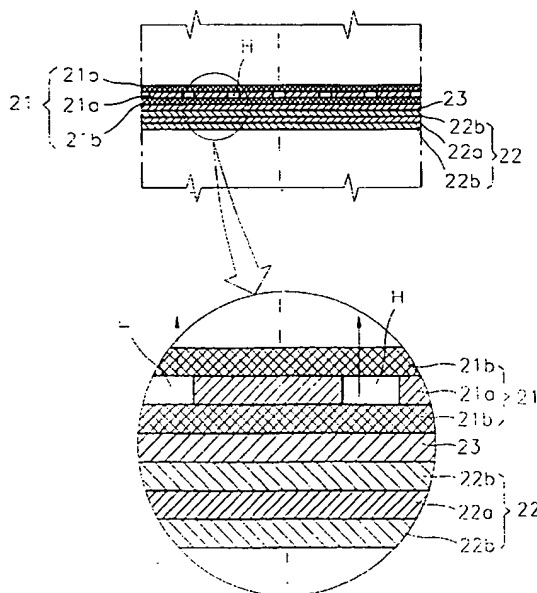

## Description

### Field of the Invention

[0001] The present invention relates to a lithium (Li) polymer battery, and more particularly, to a Li polymer battery having an enhanced negative plate structure.

### Background to the Invention

[0002] Rechargeable secondary batteries are widely used in portable wireless electric apparatus such as camcorders, cellular phones and lap-top computers. There are various types of secondary batteries including a nickel-cadmium (Ni-Cd) battery, a lead acid battery, a nickel metal hydride (Ni-MH) battery, a lithium (Li) ion battery, a Li polymer battery, a metal Li secondary battery and the like.

[0003] In particular, the metal Li secondary battery has a driving voltage of 3.6 V, a life span longer than that of the Ni-Cd battery or the Ni-MH battery, and high energy density to weight ratio, so its use is gradually expanding.

[0004] The Li secondary battery is classified into a Li-ion battery using a liquid electrolyte and a Li polymer battery using a polymer solid electrolyte, according to the type of electrolyte. The Li polymer battery can be embodied into various shapes as opposed to the Li-ion battery, and has merits of high stability and light weight.

[0005] Figure 1 shows the structure of a Bellcore Li polymer battery, a type of a Li polymer battery. Referring to Figure 1, a positive plate 11 and a negative plate 12 are stacked with a separator 13 interposed therebetween, each having a multilayered structure. The positive plate 11 consists of a positive collector 11a having a plurality of openings h1, and positive sheets 11b attached to both surfaces of the positive collector 11a. Also, the negative plate 12 consists of a negative collector 12a having a plurality of openings h2 and negative sheets 12b attached to both surfaces of the negative collector 12a. The positive and negative collectors 11a and 12a are formed of expanded metal.

[0006] A manufacturing process of the Bellcore Li polymer battery having the above structure will be described.

[0007] First, acetone as a solvent, a positive or negative active material, a binder, a conductive material and a plasticizer are mixed to prepare a slurry. Then the slurry is deposited on a polyethylene (PET) base film by a Doctor-blade method to form a thin sheet, the PET base film is removed to obtain an electrode sheet formed of the corresponding active material. Then, both surfaces of the electrode sheets are laminated to each collector at a high temperature by applying pressure, and then cut to a predetermined size.

[0008] The resulting positive and negative plates 11 and 12 are combined with the separator 13 interposed therebetween, and the stacked structure is laminated

further at a high temperature by applying pressure, thereby resulting in a bi-cell structure. Then, the bi-cell structure is soaked in ether to extract the plasticizer. Then an electrode assembly is formed having a 9 layer bi-cell structure. Then, positive and negative terminals are welded onto the assembly, and electrolyte is infiltrated into the empty space from which the plasticizer has been extracted. Finally, a casing is formed around the resulting product.

[0009] In the conventional Li polymer battery completed by the above method, the positive and negative collectors 11a and 12a require the openings h1 and h2 through which the plasticizer is extracted, so manufacturing the positive and negative collectors 11a and 12a is complicated. Also, adhesive forces between the positive collector 11a and the positive sheets 11b and between the negative collector 12a and the negative sheets 12b become weak due to burr generated during the formation of the openings h1 and h2. In addition, the thicknesses of the positive and negative plates 11 and 12 are nonuniform.

[0010] Also, when attaching the electrode sheets 11b and 12b to the positive and negative collectors 11a and 12a, respectively, bubbles may form in the spaces between the sheet and collector due to the openings h1 and h2, thereby lowering conductivity of the positive and negative collectors 11a and 12a.

[0011] Also, the expanded metal forming the positive and negative collectors 11a and 12a is supplied in a roll having a width of less than 300mm. The expanded metal has the property of being extendible in a longitudinal direction by force. Thus, it is difficult to manufacture the positive and negative collectors 11a and 12a through a continuous process by applying tensile stress.

[0012] In general, the material of the collectors determine the cost of the battery. Thus, using the expanded metal as a material for the collectors increases the cost of the battery, compared to using punched metal.

[0013] Also, as the expanded metal is mechanically processed, the metal itself is subject to stress. That is, when the expanded metal is cut in a predetermined size, fine powder of arsenic acid is separated from the collector made of the expanded metal. Also, because the collector made of the expanded metal is in the form of a mesh, burr is generated due to expansion of strands in the mesh, thereby causing an electrical short circuit.

### Summary of the Invention

[0014] According to a first aspect of the present invention, there is provided a lithium (Li) polymer battery comprising: a positive plate including a positive collector having a plurality of openings and a positive active material layer formed on at least one surface of the positive collector; a negative plate including a negative collector in a foil form, and a negative active material layer formed on at least one surface of the negative collector; and a separator between the positive and negative plates, for

insulating the positive and negative plates.

[0015] The present invention provides a lithium (Li) polymer battery in which a negative collector is formed in a foil form without openings, thereby improving the performance of plates and the productivity of the battery.

[0016] Preferably, the negative collector is formed of a copper (Cu) foil.

### Brief Description of the Drawings

[0017] An example of the present invention will now be described in detail with reference to the accompanying drawings in which:

Figure 1 is a partial sectional view of an electrode assembly of a conventional lithium (Li) polymer battery;

Figure 2 is an exploded perspective view of a Li polymer battery according to the present invention; and,

Figure 3 is a partial sectional view of an electrode assembly shown in Figure 2.

### Detailed Description

[0018] Referring to Figure 2, a lithium (Li) polymer battery according to the present invention comprises an electrode assembly 20, a lower case 31 having a receiving portion 32 for holding the electrode assembly 20, and an upper case 33 which covers the receiving portion 32 to seal the electrode assembly 20.

[0019] The electrode assembly 20 is formed by repeatedly stacking a positive plate 21 and a negative plate 22 with a separator 23 interposed therebetween, and positive taps 26a and negative taps 24a are extended from the positive plates 21 and the negative plates 22, respectively.

[0020] The positive taps 26a and the negative taps 24a form a positive tap bundle 26 and a negative tap bundle 24 respectively, which are connected to a positive terminal 25 and a negative terminal 27 respectively. The positive terminal 25 and the negative terminal 27 are drawn out of the case when the electrode assembly 20 is put in the receiving portion 32 of the lower case 31 and the receiving portion 32 is then covered by the upper case 33.

[0021] Referring to Figure 3, the positive plate 21 consists of a positive collector 21a having a plurality of openings H and a positive active material layer 21b formed on at least one surface of the positive collector 21a. Also, the negative plate 22 consists of a negative collector 22a in a foil form and a negative active material layer 22b formed on at least one surface of the negative collector 22a. The positive plate 21 is combined with the negative plate 22 with the separator 23 interposed therebetween in order to insulate the plates 21 and 22, forming a cell. Then, such a cell is repeatedly stacked to form the electrode assembly 20.

[0022] According to the present invention, preferably, the negative collector 22a is formed of a copper (Cu) foil without openings, and the positive collector 21a is formed of expanded metal or punched metal containing aluminum (Al), and has a plurality of openings H.

[0023] The positive plate 21 and the negative plate 22 are obtained by depositing a positive active material slurry and a negative active material slurry on both surfaces of positive collector 21a and negative collector 22a respectively. The negative active material slurry is prepared by dissolving (10% total volume) polyvinylidene fluoride (PVDF) as a binder in N-methyl-2-pyrrolidone (NMP) and adding (18% total volume) plasticizer, (2% total volume) carbon black as a conductive material and (70% total volume) carbon as a negative active material to the solution, and then stirring the mixture until it reaches a viscosity of 20,000~30,000 centipoise (cps).

[0024] Also, the positive active material slurry is prepared by dissolving (10% total volume) PVDF as a binder in acetone, adding (15~18% total volume) plasticizer, (2~5% total volume) carbon black as a conductive material and (70% total volume)  $\text{LiCoO}_2$  as a positive active material to the solution, and then stirring the mixture until it reaches a viscosity of 20,000cps.

[0025] Preferably, the prepared negative and positive active material slurries are directly coated on both surfaces of the respective negative and positive collectors 22a and 21a by the Doctor-blade method.

[0026] According to another preferred embodiment, a positive active material slurry is prepared by dissolving (10% total volume) PVDF as a binder in acetone, adding (15~18% total volume) plasticizer, (2~5% total volume) carbon black as a conductive material and (70% total volume)  $\text{LiCoO}_2$  as a positive active material to the solution, and then stirring the mixture until it reaches a viscosity of 20,000cps.

[0027] Also, a negative active material slurry is prepared by dissolving (10% total volume) PVDF as a binder in acetone, adding (15~18% total volume) plasticizer, (2~5% total volume) carbon black as a conductive material and (70% total volume) carbon as a negative active material to the solution, and then stirring the mixture until it reaches a viscosity of 20,000cps.

[0028] Then, the prepared positive and negative active material slurries are made into thin sheets, e.g., by the Doctor-blade method, and then the resulting sheets are attached to both surfaces of the respective positive and negative collectors 21a and 22a.

[0029] The amount of the materials contained in the positive and negative active material slurries can be varied without limitation to the above embodiments.

[0030] According to the present invention, the Cu foil without openings is adopted as the negative collector 22a, so that electrical conductivity is improved, adhesive force during the laminating on the negative collector 22a with the active material layer 22b is strong, and the thickness of the negative plate is uniform. Also, generation

of burr or bubbles between the conventional negative collector and negative sheet, caused by the openings, can be prevented

[0031] In addition, even though the negative collector 22a has no openings, the plasticizer contained in the negative plate 22 and the separator 23 can be extracted through the openings H of the positive collector 21a in the direction indicated by the arrows in Figure 3.

[0032] Such effect of the present invention can be understood more fully through the following experiments.

#### Experimental Example 1

[0033] The amount of plasticizer extracted from the conventional battery adopting the negative collector 12a which is made of a Cu expanded metal and has openings was compared with that of the battery adopting a Cu foil as the negative collector 22a according to the present invention. Here, each electrode assembly had a 9-layer bi-cell structure, and (15% total volume) the plasticizer was used for the preparation.

[0034] As a result, the amount of plasticizer extracted from the conventional battery was approximately 3.4801g, and that from the battery according to the present invention was approximately 3.4526g, which were nearly the same. That is, it can be understood that the amount of plasticizer extracted from the battery is not decreased even though the Cu foil without openings is adopted as a negative collector.

#### Experimental Example 2

[0035] A positive sheet having a thickness of approximately 80 $\mu$ m and a negative sheet having a thickness of approximately 120 $\mu$ m were respectively attached to the positive collector 21a formed of an Al expanded metal, and the negative collector 22a formed of a Cu foil having a thickness of 20 $\mu$ m, to obtain a battery according to the present invention. Then, resistance of the battery was measured and then compared with that of the conventional battery.

[0036] As a result, the resistance of the battery according to the present invention was 50~60m $\Omega$  while that of the conventional battery was 80~100m $\Omega$ . That is, it can be understood that the electrical conductivity of the Li polymer battery according to the present invention increases as the contact area between the electrode negative sheet and the negative collector increases.

[0037] Also, the adhesive force of the negative plate was increased to 18gf/mm<sup>2</sup> or more compared to 10gf/mm<sup>2</sup> of the conventional negative plate. As a result, the life span of the battery was increased by approximately 7% or more with respect to the conventional battery, and the energy density of the battery increased by 5~10%.

[0038] In addition, because a foil having a comparatively large tensile strength is used as a negative collector, manufacturing through continuous process is possible.

Also, the negative active material slurry can be coated directly onto the negative collector, so that manufacture of the plate is simplified.

#### Claims

1. A lithium (Li) polymer battery comprising:

a positive plate (21) including a positive collector (21a) having a plurality of openings and a positive active material layer (21b) formed on at least one surface of the positive collector (21a);

a negative plate (22) including a negative collector (22a) in a foil form, and a negative active material layer (22b) formed on at least one surface of the negative collector (22a); and

a separator (23) between the positive (21) and negative (22) plates, for insulating the positive (21) and negative (22) plates.


2. The lithium polymer battery of claim 1, wherein the negative collector (22a) is formed of a copper (Cu) foil.

3. The lithium polymer battery of claim 1, wherein the positive collector (21a) is formed of expanded metal or punched metal.

4. The lithium polymer battery of claim 2, wherein the positive (21b) and negative (22b) active material layers are formed by coating positive and negative active material slurries, respectively, on at least one surface of the positive collector (21a) and at least one surface of the negative collector (22a).


EP 0 994 522 A2

FIG. 1 (PRIOR ART)

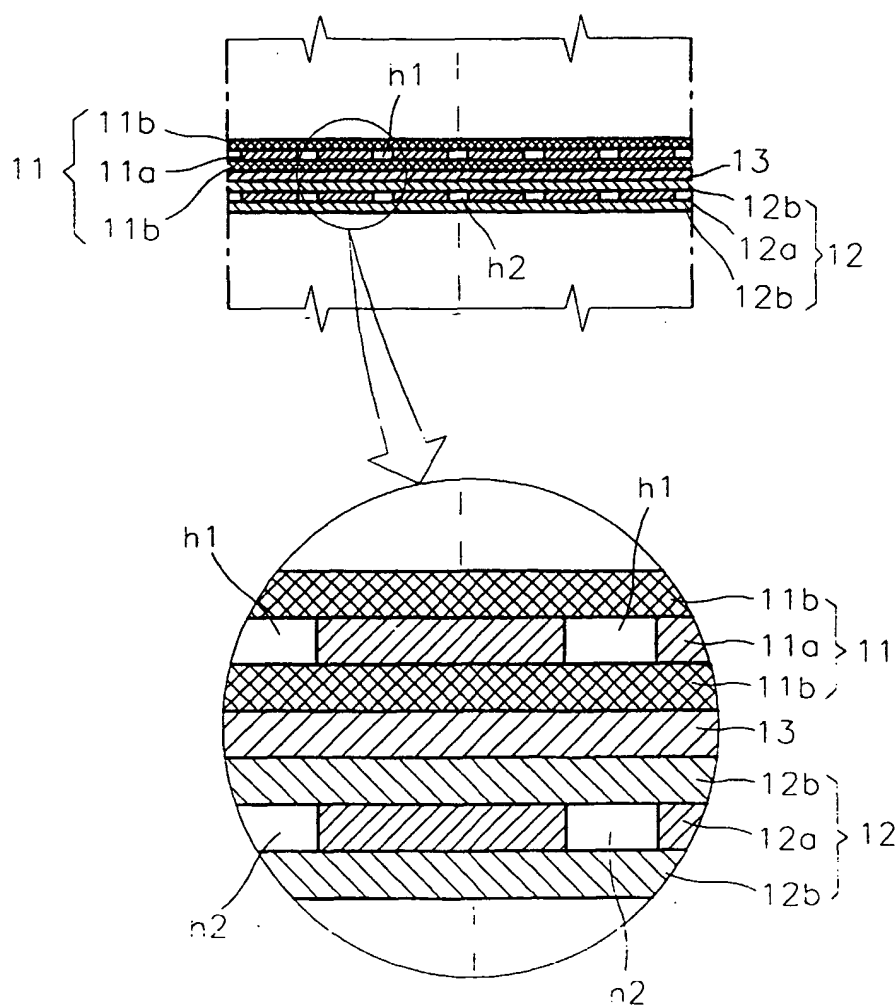


EP 0 994 522 A2

FIG. 2

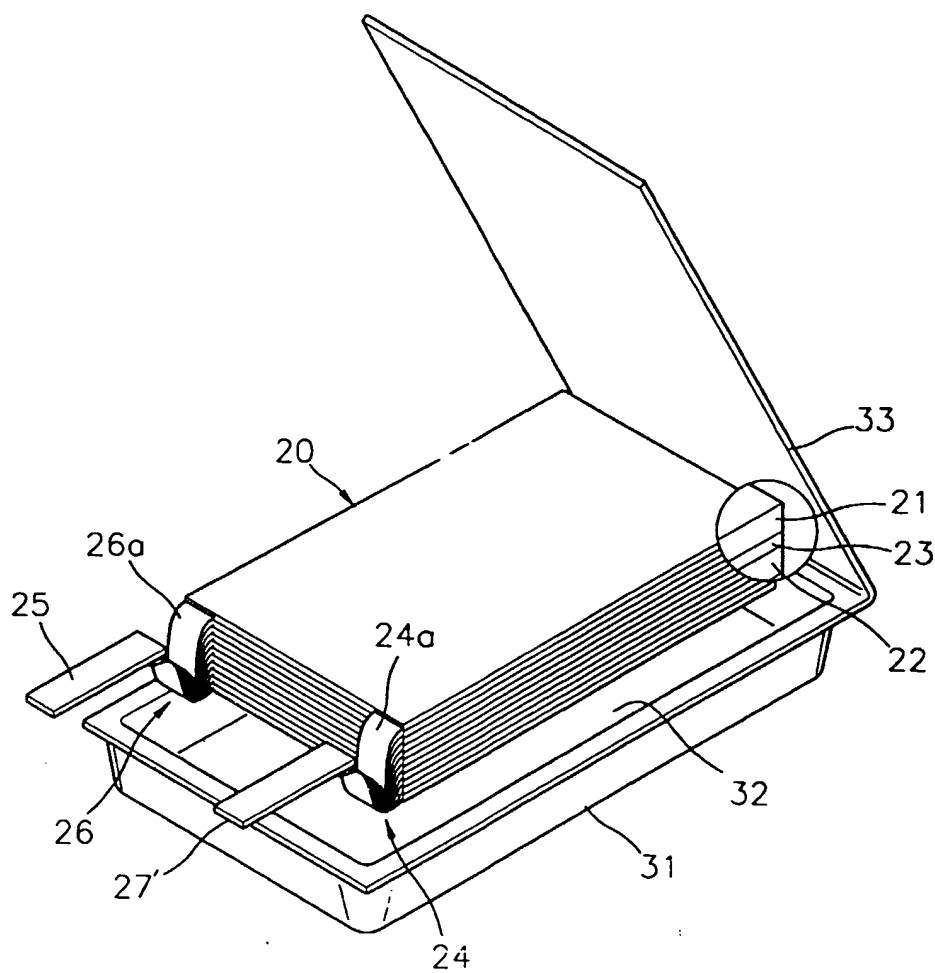

EP 0 994 522 A2

FIG. 3

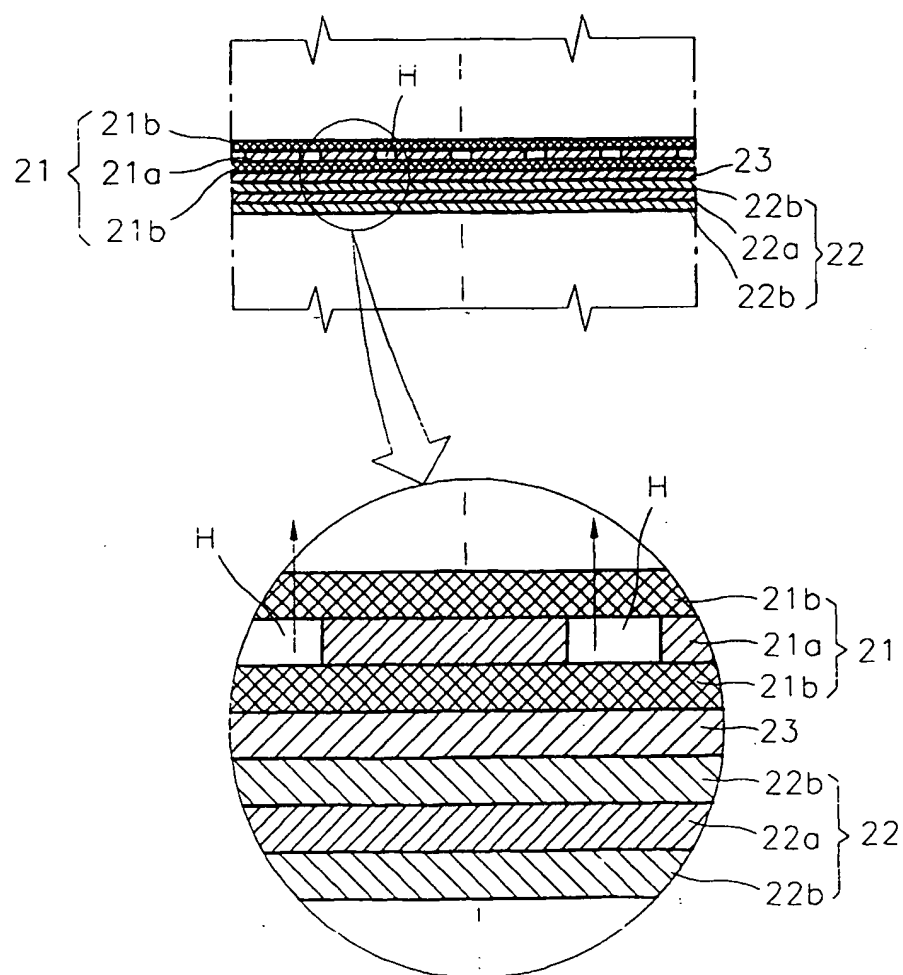



(19)



Europäisches Patentamt

European Patent Office

Office européen des brevets



(11)

**EP 0 994 522 A3**

(12)

**EUROPEAN PATENT APPLICATION**

(88) Date of publication A3:  
19.09.2001 Bulletin 2001/38

(51) Int Cl.7: **H01M 10/40**, **H01M 4/74**,  
**H01M 4/66**, **H01M 4/70**

(43) Date of publication A2:  
19.04.2000 Bulletin 2000/16

(21) Application number: **99308071.2**

(22) Date of filing: **13.10.1999**

(84) Designated Contracting States:  
**AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU**  
**MC NL PT SE**  
Designated Extension States:  
**AL LT LV MK RO SI**

(72) Inventors:  
• Chang, Youn-han  
Suwon-city, Kyungki-do (KR)  
• Kim, Jung-ho  
Suwon-city, Kyungki-do (KR)

(30) Priority: **13.10.1998 KR 9842711**


(74) Representative: Ertl, Nicholas Justin  
Elkington and Fife,  
Prospect House,  
8 Pembroke Road  
Sevenoaks, Kent TN13 1XR (GB)

(71) Applicant: **Samsung Display Devices Co., Ltd.**  
**Suwon-City, Kyungki-do 445-970 (KR)**

**(54) Lithium polymer battery**

(57) A lithium (Li) polymer battery is provided. The Li polymer battery includes: a positive plate (21) including a positive collector (21a) having a plurality of openings and a positive active material layer (21b) formed on at least one surface of the positive collector (21a); a

negative plate (22) including a negative collector (22a) in a foil form, and a negative active material layer (22b) formed on at least one surface of the negative collector (22a); and a separator (23) between the positive (21) and negative (22) plates, for insulating the positive (21) and negative (22) plates.

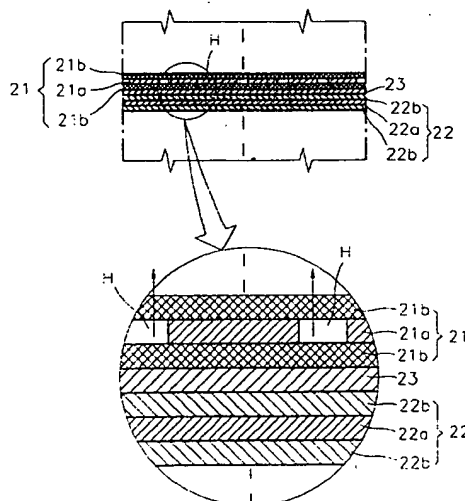**FIG. 3**

EP 0 994 522 A3

European Patent  
Office

## EUROPEAN SEARCH REPORT

Application Number  
EP 99 30 8071

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.7)
X	EP 0 647 974 A (TOKYO SHIBAURA ELECTRIC CO) 12 April 1995 (1995-04-12) * page 2, line 1 - line 2 * * page 4, line 20 - line 30 * * page 8, line 20 - line 24 * * example 1 *	1-4	H01M10/40 H01M4/74 H01M4/66 H01M4/70
A	US 5 552 239 A (GOZDZ ANTONI S ET AL) 3 September 1996 (1996-09-03) * column 3, line 20 - line 30 * * example 2 *	1-4	
A	EP 0 849 819 A (MITSUBISHI ELECTRIC CORP) 24 June 1998 (1998-06-24) * column 3, line 39 - line 57 * * column 11, line 47 - column 12, line 54 *	1,2,4	
A	EP 0 762 521 A (FUJI PHOTO FILM CO LTD) 12 March 1997 (1997-03-12) * page 6, line 39 - page 7, line 14 * * page 8, line 15 - line 21 * * page 10, line 14 - line 30 *	1-4	TECHNICAL FIELDS SEARCHED (Int.Cl.7) H01M
A	EP 0 777 287 A (MATSUSHITA ELECTRIC IND CO LTD) 4 June 1997 (1997-06-04) * page 6, line 2 - line 12 *	1,3,4	
The present search report has been drawn up for all claims			
Place of search THE HAGUE		Date of completion of the search 30 July 2001	Examiner Gamez, A
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document			

EPC FORM 1503 01/82 (P04031)

EP 0 994 522 A3

**ANNEX TO THE EUROPEAN SEARCH REPORT  
ON EUROPEAN PATENT APPLICATION NO.**

EP 99 30 8071

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report. The members are as contained in the European Patent Office EDP file on  
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

30-07-2001

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
EP 0647974 A	12-04-1995	DE 69415911 D	25-02-1999
		DE 69415911 T	10-06-1999
		JP 7235296 A	05-09-1995
		US 5498492 A	12-03-1996
US 5552239 A	03-09-1996	CA 2197431 A	07-03-1996
		EP 0770270 A	02-05-1997
		IL 115032 A	15-07-1998
		JP 9510825 T	28-10-1997
		NZ 291989 A	26-08-1998
		WO 9607213 A	07-03-1996
EP 0849819 A	24-06-1998	JP 10172537 A	26-06-1998
		US 5981107 A	09-11-1999
EP 0762521 A	12-03-1997	DE 69601679 D	15-04-1999
		DE 69601679 T	22-07-1999
		JP 9293538 A	11-11-1997
		US 5871863 A	16-02-1999
		JP 9293512 A	11-11-1997
		US 5882821 A	16-03-1999
EP 0777287 A	04-06-1997	JP 9147920 A	06-06-1997
		DE 69606506 D	09-03-2000
		DE 69606506 T	21-06-2000
		US 5773166 A	30-06-1998

EPO FORM P/3459

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82